

LONGi Solar LR4-60HPH 360

Brand: Longi Solar

Product Code: LR4-60HPH 360

Availability: In Stock

Weight: 37.04lb

Dimensions: 69.09in x 40.87in x 1.38in

Price: \$900.00

Ex Tax: \$900.00

Short Description

In-depth review of the LONGi Solar 360W solar panel covering efficiency, warranty details, pricing and value analysis. Read before installing these panels.

Description

Longi Solar 360w Mono Solar Panel - LR4-60HPH-360M LONGi, 360w Mono PERC w 120 Half-cut Cells (60 cell equivalent), Black frame, white backsheet and MC4 connectors w/ 1200mm cable, LR4-60HPH-360M Less components and lower cost. Excellent performance under the IEC and UL Standard for 1500V system voltage brings lower system side cost.



LONGi Solar LR4-60HPH 360

- **Power Rating:** 360W
 - Cell Type Monocrystalline
 - Panel Dimensions 1776.0 mm L, 1052.0 mm W, 35.0 mm D

Solar Panel Aesthetics Black Cell, White Frame, White Backsheet
Snow Load 5400 Pa, Wind Load 2400 Pa

- **Linear Warranty Term:** 25 years
- **Product Warranty Term:** 12 years
- **Made in Vietnam and Malaysia.**
- **Approximate cost per watt \$2.98**

Solar Panel Performance

Rated Power 360W

Efficiency 19.3%

LONGi's LR4-60HI313 345~365M solar modules efficiency ratings range between 18.5% and 19.5% putting them on the higher end of average solar panel efficiency. The Hi-MO 4 series has proprietary Smart Soldering Technology with improved 9-wire bus bar for enhanced electron flow.

Power Tolerance 0/+5W

Power tolerance refers to the amount of electricity it will produce either above or below its rated power capacity at Standard Test Conditions (STC). The smaller the power tolerance deviation or range, the more accurate the rated power capacity is.

LONGi Hi-MO 4 solar modules have a power tolerance of $-0/+5\text{W}$. This means LONGi Solar panels will, at the very minimum, be operating at their rated capacity, However, these panels have exceeded, by as much as 5 watts above its rated capacity.

For example, a LONGi Solar panel rated at 360 W will be able to operate anywhere from 360 W to 365 W (or 5 watts higher than 360) under STC.

Temperature Coefficient P_{Max}: -0.37

Solar panels perform best at 77°F (25°C). Here in Texas, obviously, we see temperatures that far exceed 77°F for long portions of the year. A solar panel's temperature coefficient is a measurement indicating how well a specific model of solar panel will perform outside of ideal operating conditions. Knowing a panel's temperature coefficient and the temperature of the panel allow you to predict your panel's performance during the dog days of summer.

Temperature coefficients are calculated in Celsius. With each degree above 25° C /77° F, a given solar panel's electric output will be diminished by its temperature coefficient.

Using the above methodology, the LONGi LR4-60HPH 360 panel has a temperature coefficient of $-0.37\%/^{\circ}\text{C}$. Hence, when this panel's temperature increases by one degree, from 25°C to 26°C (77° F to 79° F), expect a 0.37% reduction in potential electric output.

When it's July in Texas and temperatures have climbed to 95° F/35° C, expect electric output to decrease by 3.7%. When the hottest hour of the summer drives the mercury into the triple digits, say 113° F/ 45° C, the LONGi LR4-60HPH 360 will decrease approximately 7.2%.

LONGi HiMO-4. All blackLR4-60HPH


Product Name and Model Number	HiMO LR4-60HPH 360w
Manufacturer Name and Rating	LONGI
Rated Power Output	360 watt
Efficiency Percentage	19.3%
Power Tolerance	+1.5%
Temperature Coefficient	-0.37%
Resiliency Specs	Snow load 5400Pa, Wind load 2400Pa
Output Warranty Term Length	25 year,

Output Warranty Decline Rate	-0.45%
Materials Warranty Term Length	12 years
Cell Color(s)	Black
Frame	White Anodized Aluminum Alloy
Backsheet Color(s)	White
Cell Type (e.g. monocrystalline)	Monocrystalline PERC Gallium doped
Panel Dimensions	1776 X 1052 X 35mm
Weight	44. lbs/ 20.0kg
Number of Cells	72 half cut cells
Connector Type	MC4
Manufacturer Location	China, Vietnam, Malaysia
Certifications Received (UL, IEC, ISO)	IEC, UL, ISO,
Average Cost per Watt	.76
Marketplace Average Pricing	.90 - 1.50
Great/Above Market Price Indicators	excellent value

Linear Warranty 25 year,

Output Decline

- Year 1 2.0%
- Years 2 to 25 0.55%
- Output at End of Warranty Term 84.8%
- Product Warranty Term 12 years

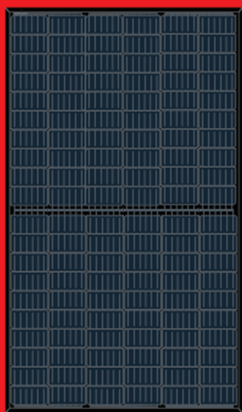


LR4-60HPB 345~365M

Hi-MO 4m
(Black)

High Efficiency
Low LID Mono PERC with
Half-cut Technology

10-year Warranty for Materials and Processing;
25-year Warranty for Extra Linear Power Output

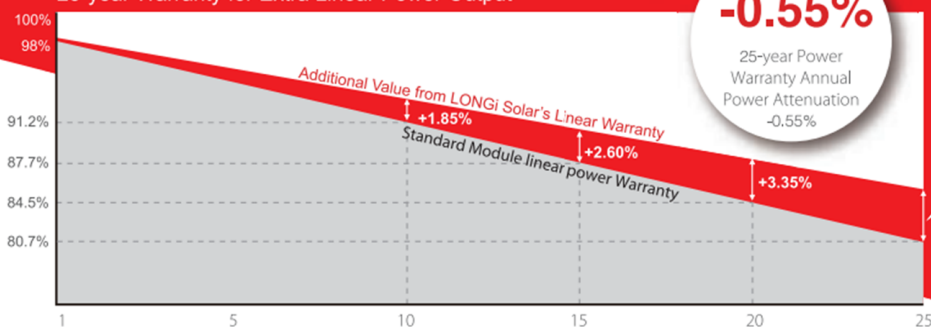

Complete System and Product Certifications

IEC 61215, IEC61730, UL1703

ISO 9001:2008: ISO Quality Management System

ISO 14001: 2004: ISO Environment Management System

TS62941: Guideline for module design qualification and type approval

OHSAS 18001: 2007 Occupational Health and Safety



* Specifications subject to technical changes and tests. LONGi Solar reserves the right of interpretation.

Positive power tolerance (0 ~ +5W) guaranteed

High module conversion efficiency (up to 19.5%)

Slower power degradation enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

Solid PID resistance ensured by solar cell process optimization and careful module BOM selection

Reduced resistive loss with lower operating current

Higher energy yield with lower operating temperature

Reduced hot spot risk with optimized electrical design and lower operating current

LONGi

Room 801, Tower 3, Lujiazui Financial Plaza, No.826 Century Avenue, Pudong Shanghai, 200120, China
Tel: +86-21-80162606 E-mail: module@longi-silicon.com Facebook: www.facebook.com/LONGi Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

Warranty Specifications

Warranty Specifications

LONGi mono facial solar panels offers a 25-year linear production warranty. Both mono facial and bifacial panels are covered by a 12-year product warranty that guarantees all solar panels to be defect free, and with normal use and proper installation.

Specification

Solar Panel Configuration	
Cell Type	Monocrystalline
Panel Aesthetics	Black Cell, White Frame, White Backsheet
Panel Dimensions	69.09 x 40.87 x 1.38 inches
Power Rating	360W
Snow load	5400 Pa
Wind Load	2400 Pa
Solar Panel Warranty	
Linear Production	25 Years
Warranty Term	
Product Warranty Term	12 Years
PV Product Performance	
Efficiency	19.3%
Power Tolerance	0/+5W
Temperature Coefficient	PMax: -0.37
Others	
Average Cost / Watt	\$3.10
Where it's Made	Made in Vietnam, Malaysia